

# T-LED 80/350 1...10V SLIM

Direct current dimmable electronic drivers with DIP-SWITCH  
Alimentatori elettronici regolabili in corrente continua con DIP-SWITCH

Made in Italy

1...10 V PUSH constant CURRENT

EN EC 05 KEMA EUR 110 M M EL NOT-SELV

RIPPLE FREE  
AM DIMMING



ACTIVE PFC DIP-SWITCH 1-2kV DIFF. 2kV COMM. NTC INPUT SAFETY PROTECTIONS

Article Articolo	Code Codice	P out W	V out DC	I out DC	V out max.	ta °C	tc °C	$\lambda$ Power Factor	$\eta$ max. Efficiency <sup>(1)</sup>
T-LED 80/350 1-10V SLIM	127080	35	30...250	140 mA cost.	300	-25...+55	80	0,95 <sup>(2)</sup>	>93
		38	30...250	155 mA cost.					
		42,5	30...250	170 mA cost.					
		46	30...250	185 mA cost.					
		50	30...250	200 mA cost.					
		53,5	30...250	215 mA cost.					
		57,5	30...250	230 mA cost.					
		61	30...250	245 mA cost.					
		65	30...250	260 mA cost.					
		68,5	30...250	275 mA cost.					
		72,5	30...250	290 mA cost.					
		76	30...250	305 mA cost.					
		80	30...250	320 mA cost.					
80	30...235	335 mA cost.							
80	30...228	350 mA cost.							

<sup>(1)</sup> Referred to  $V_{in} = 230$  V, 100% load - Riferito a  $V_{in} = 230$  V, carico 100%  
<sup>(2)</sup>  $P_{out} > 35$  W

**Rated Voltage**  
Tensione Nominale  
220 ÷ 240 V

**Frequency**  
Frequenza  
50/60 Hz

**AC Operation range**  
Tensione di utilizzo AC  
198 ÷ 264 V

**DC Operation range**  
Tensione di utilizzo DC  
(see page info15)  
DC 176 ÷ 280 V  
(NO PUSH mode function)

**Power**  
Potenza  
4 ÷ 80 W

**Output current ripple**  
 $\leq 3\%$  <sup>(1)</sup>

**Reference Norms**  
Norme di riferimento  
EN 50172 (VDE 0108)  
EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61347-1  
EN 61347-2-13  
EN 61547  
EN 62384  
EN 62386

**Max. pcs for CB B16A**  
(see page info17)  
30 pcs

**In rush current**  
45A 100 $\mu$ sec

- Features**
- Multipower driver supplied with dip-switch for the selection of the output current.
  - Driver for built-in use.
  - It can be used for lighting equipment in protection class I.
  - Active Power Factor Corrector.
  - Analogic input for thermal sensor connection.
  - Current regulation  $\pm 5\%$  including temperature variations.
  - Output is not isolated from the input.
  - Stand-by power less than 0,5 W.
  - Input and output terminal blocks on the opposite sides (wire cross-section up to 1,5 mm<sup>2</sup> / AWG15).
  - Protections:
    - against overheating and short circuits;
    - against mains voltage spikes;
    - against overloads.
  - Thermal protection = C.5.e.

- Caratteristiche**
- Alimentatore multipotenza fornito di dip-switch per la selezione della corrente in uscita.
  - Alimentatore da incorporare.
  - Utilizzabile per apparecchi di illuminazione in classe di protezione I.
  - PFC attivo.
  - Entrata analogica per sensore termico.
  - Corrente regolata  $\pm 5\%$  incluse variazioni di temperatura.
  - Uscita non isolata dall'ingresso.
  - Consumo in stand-by minore di 0,5 W.
  - Morsetti di entrata e uscita contrapposti (sezione cavo fino a 1,5 mm<sup>2</sup> / AWG15).
  - Protezioni:
    - termica e cortocircuito;
    - contro le extra-tensioni di rete;
    - contro i sovraccarichi.
  - Protezione termica = C.5.e.

7 YEARS WARRANTY 3% FAILURE RATE  
10 YEARS WARRANTY 5% FAILURE RATE  
PRODUCER'S LIABILITY  
10 YEARS WARRANTY TO THE END USER ACCORDING TO THE EUROPEAN DIRECTIVE 2002/95/EC

3.2.1


Dimmable multipower DIP-SWITCH drivers - Linear case - 1-10V & PUSH Alimentatori multipotenza regolabili con DIP-SWITCH - Formato lineare - 1-10V & PUSH

## Direct current dimmable electronic drivers with DIP-SWITCH Alimentatori elettronici regolabili in corrente continua con DIP-SWITCH


Made in Italy

**BUILT-IN SCREW FIXING** Weight - Peso gr. 215 / 7,5 oz.  
Pcs - Pezzi 70

Compatible with ZHAGA (BL3/ZS7 H5D/ ZS7 H7D)

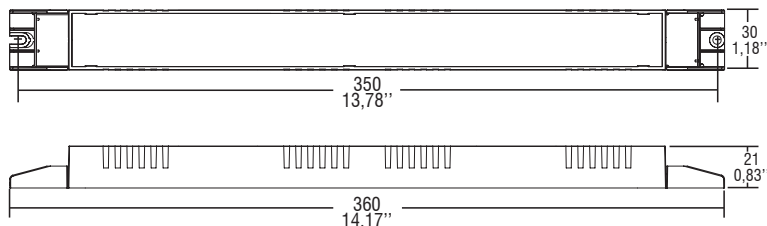

### Wiring diagram - Schema di collegamento (Max. LED distance at page info8 - Massima distanza LED a pagina info8)

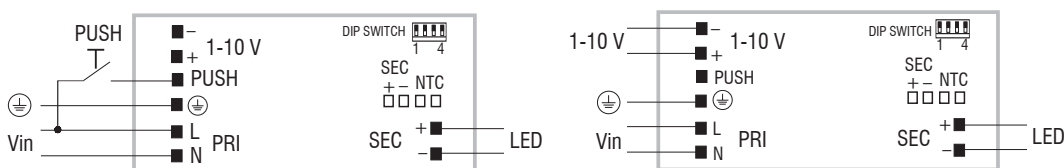

PUSH diagram - Collegamento PUSH

1...10 V diagram - Collegamento 1...10 V

### Operation Mode

- Light regulation 10-100% by means of 1-10V (I=1mA) and 0/10-100% by means of PUSH function.
- Specific dimming terminal connection with a 1...10 Vdc electronic potentiometer (1...10 V local dimming, double insulation required for external connection).
- Light regulation 0/10 - 100 % by means of PUSH function (mains voltage):
  - a short push to turn on and off;
  - a longer push to increase or decrease light intensity;
  - regulation automatically stops at minimum and maximum values;
  - for another on, regulation or off command, release the push button and give the desired command again.
- Possibility to use PUSH function to 4/5 drivers.
- Maximum length of the cable, from push button to last driver, must be max. 15 m / 49 ft. In case of applications where the cable is longer than 15 m / 49 ft, keep this separate from the mains cable.
- ATTENTION: only use normally open push buttons with no incorporated warning light.

For additional details for regulations see pages info12-14.

### Modalità di funzionamento

- Regolazione della luminosità 10-100 % mediante funzione 1-10 V (I=1 mA) e 0/10-100 % mediante funzione PUSH.
- Provisto di morsetto specifico per la regolazione collegando un potenziometro elettronico 1...10 Vdc (dimmerazione locale 1...10 V, per connessioni esterne all'apparecchio garantire il doppio isolamento).
- Regolazione della luminosità 0/10 - 100% mediante la funzione PUSH (tensione di rete):
  - una pressione breve per accendere e spegnere;
  - una pressione prolungata per aumentare o diminuire l'intensità luminosa;
  - la regolazione si ferma automaticamente ai valori minimi e massimi;
  - per un nuovo comando accensione, regolazione o spegnimento, rilasciare il pulsante e dare nuovamente il comando desiderato.
- Possibilità di utilizzo funzione PUSH fino a 4/5 alimentatori.
- La lunghezza massima del cavo, dal pulsante all'ultimo trasformatore, deve essere max. 15 m / 49 ft. In caso di applicazioni dove il cavo superi i 15 m / 49 ft, tenere lo stesso separato dal cavo di rete.
- ATTENZIONE: usare solo pulsanti di tipo normalmente aperto privi di spia luminosa incorporata.

Per ulteriori dettagli sulle regolazioni vedi pagine info12-14.

3.2.1

Dimmable multipower DIP-SWITCH drivers - Linear case - 1-10V & PUSH  
Alimentatori multipotenza regolabili con DIP-SWITCH - Formato lineare - 1-10V & PUSH