

REDISCOVER LIGHT

An innovative and flexible plug-in system, specially developed for the illumination of industrial and warehouse halls. Available in two different lengths, various power classes and with two beam angles.



KOPERNIKUS

Article Number	Description	Size	Color Temperature	Energy Consumption	Beam Angle	Luminous Flux	Color Rendering Index	Function
29001400	LED LLS 1500 5PH 50W/60D/840 230V	1500x70x76 mm	4000 K	50 W	60°	7500 lm	80	5-phase
29001401	LED LLS 1500 5PH 50W/90D/840 230V				90°			
29001402	LED LLS 1500 5PH 70W/60D/840 230V			60°	10500 lm			
29001403	LED LLS 1500 5PH 70W/90D/840 230V			90°				
29001404	LED LLS 3000 5PH 100W/60D/840 230V	3000x70x76 mm		100 W	60°	15000 lm		
29001405	LED LLS 3000 5PH 100W/90D/840 230V				90°			
29001406	LED LLS 3000 5PH 140W/60D/840 230V			140 W	60°	21000 lm		
29001407	LED LLS 3000 5PH 140W/90D/840 230V				90°			
Accessoires								
29001408	LED LLS 1500 5PH BLANK COVER	1500x70x54 mm	~	~	~	~	~	5-phase
29001409	LED LLS 3000 5PH BLANK COVER	3000x70x54 mm	~	~	~	~	~	
29001450	LED LLS 5PH TERMINAL SET	~	~	~	~	~	~	
29001453	LED LLS SUSPENSION KIT 1x3M	~	~	~	~	~	~	
29001454	LED LLS MOUNTING CLIP	~	~	~	~	~	~	

8-phase versions (non-dimmable, DALI) on request
More beam angles and special solutions on request

Linear Lighting

LEDON
pioneering light

WHAT YOU MAY EXPECT FROM US

- ▶ Customer-friendly support
- ▶ Quick in responding and finding solutions
- ▶ High degree of flexibility
- ▶ Customer-specific solutions
- ▶ Certified manufacturing partners
- ▶ Lighting calculation
- ▶ Uncomplicated handling of guarantee matters
- ▶ Reliable delivery




Technical features	Efficiency > 150 lm/W
	Lens for UGR < 19 available
	Excellent dimmability with integrated DALI converter

Quality	LEDs and converter made by reputable manufacturers
	Service life 50,000 hours
	CE certification and ERP-relevant long-term tests by reputable external laboratories, also in-house tests (e.g. accelerated ageing)
	Best light quality over the whole light-emitting surface
	Sustainable packaging concept exclusively made of cardboard and efficient logistics on the construction site through packaging of 5 lights per box (less handling, less packaging waste)
	Manufacturer's guarantee of 5 years and full guarantee of 3 years
	Easy maintenance
	Simple, slim design

Installation	Versatile application options due to different lengths, wattages and angles as well as blank covers
	Self-locking connector allows tool-free mounting of the carrier system including the luminaire
	Simple plug connection
	Easy connection with screwless clamps
	Uniform end fitting over all luminaire types

Ordering example for a linear light of 42 m length

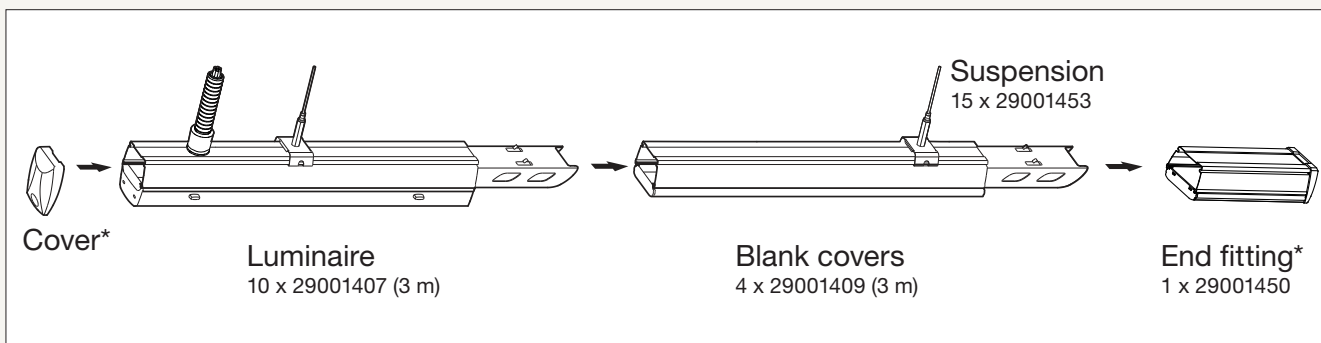

* End fitting is delivered together with the cover