


Bewegungs- und Helligkeitssensor für Casambi

Motion and Light Sensor for Casambi




CASAMBI
READY

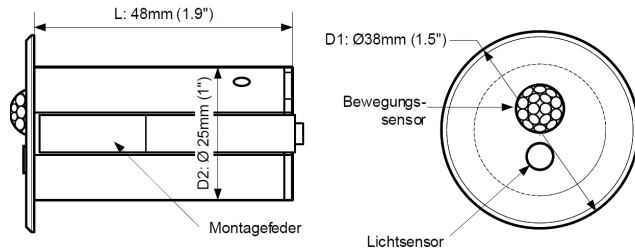

Technische Daten <i>Technical data</i>	weiß <i>white</i>	grau <i>grey</i>	schwarz <i>black</i>
Artikelnummer <i>Part no.</i>	808930	808931	808932
Typ <i>Type</i>	SEMLBT230W	SEMLBT230GR	SEMLBT230B
Versorgungseingang <i>Power supply input</i>	220..240 Vac		
Funksignal <i>Radio signal</i>	2,4..2,483 GHz; 4 dBm		
Frequenz <i>Frequency</i>	50..60 Hz		
Umgebungstemperatur <i>Ambient temperature (ta)</i>	-20..+50 °C		
Schutzart <i>Degree of protection</i>	IP44 Front / IP20		
Abmessungen <i>Dimensions</i>	38/25 x 48 mm		

- Sensor für Bewegung und Helligkeit für CASAMBI-Netzwerke
- Zum Auslösen von Leuchten, Szenen etc. in Casambi-Netzwerken
- Dort konfigurierbar und vielseitig nutzbar
- Sensor max. 5 m, 100 ° horizontal, 64 Zonen
- Einbaugerät, Montage in Bohrung 25..27 mm
- Bei Installation sind die einschlägigen Bestimmungen und die anerkannten Regeln der Technik einzuhalten.

- *Sensor for motion and brightness for CASAMBI networks*
- *For operation of luminaires, scenes etc. in Casambi networks*
- *To be configured and used in many ways*
- *Sensor max. 5 m, 100 ° horizontal, 64 zones*
- *Device built-in, mounted in drill-hole 25..27 mm*
- *For installation the relevant standards and the recognized technical rules must be respected.*

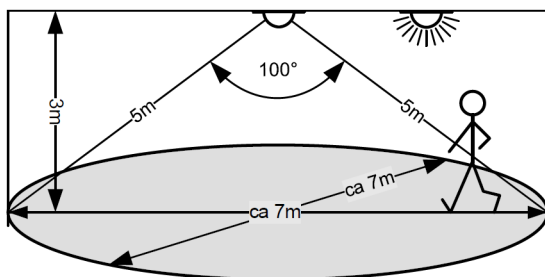

App for
iOS



App for
Android

