
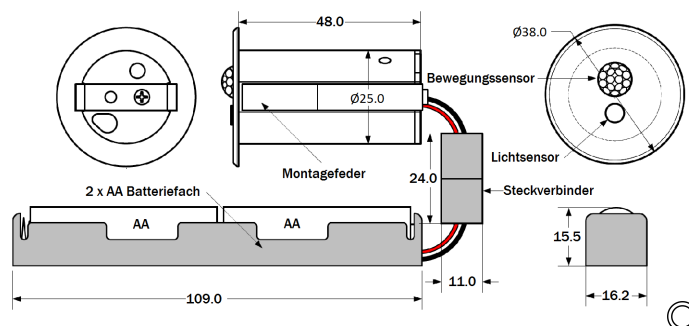


Bewegungs- und Tageslichtsensor für CASAMBI Lichtsteuerung

Motion and daylight sensor for Casambi lighting control

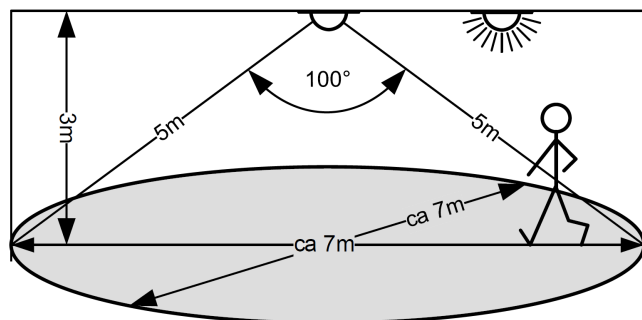

NEW!

CASAMBI
READY

CE

Technische Daten *Technical data*

	weiß <i>white</i>	grau <i>grey</i>	schwarz <i>black</i>
Artikelnummer <i>Part no.</i>	808890	808891	808892
Typ <i>Type</i>	SEMLBTBAW	SEMLBTBAGR	SEMLBTBAB
Versorgungseingang <i>Power supply input</i>	3 Vdc (2 x AA)		
Funksignal <i>Radio signal</i>	2,4..2,483 GHz; 4 dBm		
Umgebungstemperatur (ta) <i>Ambient temperature (ta)</i>	-20..+50 °C		
Schutzart <i>Degree of protection</i>	IP 44 Front / IP 20		
Abmessungen <i>Dimensions</i>	38/25 x 48 mm		

- Sensor für Bewegung und Tageslicht im Casambi Netzwerk
- Auf Smart-Geräten mit Casambi App (Apple, Android) konfigurierbar und vielseitig nutzbar z. B. zum Steuern von Leuchten, Auslösen von Szenen, etc.
- Reichweite max. 5 m, 100° Horizontal, 64 Zonen
- Einbaugerät, Montage in Bohrung 25..27 mm
- Sensor wird mit Batteriefach und 2x AA Batterie geliefert
- Zum Entkoppeln des Sensors wird der mitgelieferte Magnet benötigt
- Nur für „Evolution“ Netzwerke geeignet!

- *Sensor for motion and daylight inside Casambi networks*
- *Configurable on smart devices (Apple, Android) with Casambi app and used in many ways e.g. for operation of luminaires, triggering scenes, etc.*
- *Range max. 5 m, 100 ° horizontal, 64 zones*
- *Device built-in, mounted in drill-hole 25..27 mm*
- *Sensor is supplied with a battery compartment and 2x AA batteries*
- *The supplied magnet is required for unpairing the device*
- *Only suitable for „Evolution“ networks*

