


# Batterielose 4-fach-Fernbedienung für CASAMBI-Netzwerke

## Battery free 4 way remote control for CASAMBI networks

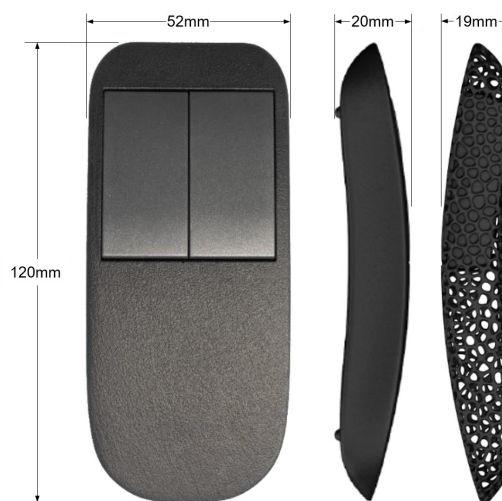

**NEW!**

CASAMBI  
READY

CE

| Technische Daten <i>Technical data</i>                   | Struktur<br><i>Structure</i>                                     | Glatt<br><i>Plain</i> |
|----------------------------------------------------------|------------------------------------------------------------------|-----------------------|
| Artikelnummer <i>Part no.</i>                            | 808897                                                           | 808898                |
| Typ <i>Type</i>                                          | RC4EMEBTB                                                        | RC4EPLBTB             |
| Funkfrequenz <i>Radio frequency</i>                      | 2,4..2,483 GHz; 0,4 dBm                                          |                       |
| Reichweite <i>Range</i>                                  | bis zu 10 Meter in einem Raum <i>up to 10 m in the same room</i> |                       |
| Geschätzte Lebensdauer <i>Estimated lifetime</i>         | 50.000 Schaltvorgänge <i>actuations</i>                          |                       |
| Umgebungstemperatur (ta) <i>Ambient temperature (ta)</i> | -20..+65 °C                                                      |                       |
| Abmessungen <i>Dimensions</i>                            | 120 x 52 x 19 mm                                                 | 120 x 52 x 20 mm      |

- Fernbedienung zur Steuerung von Casambi-Geräten
- Bis zu 4 programmierbare Tasten (dimmen, Szenen, Farbe, ...)
- Erstprogrammierung muss per Smartphone / Tablet (Apple / Android) mit NFC-Schnittstelle und der Casambi App erfolgen!
- Die Energie für das Funksignal entsteht beim Drücken der Taste durch die kinetische Energie (Energy Harvesting); es wird daher keine Batterie benötigt, wartungsfrei

- Remote control for controlling Casambi devices
- Up to 4 programmable buttons (dimming, scenes, colour, ...)
- Initial programming must be done by smartphone / tablet (Apple / Android) with an NFC interface and the Casambi app!
- The energy for the radio signal arises when pressing the button, by an electrodynamic energy generator; therefore no battery is needed, maintenance free

