

REWARDING BRIGHTNESS




Sensor

SensorLido 100

Fixed

Specifications

Colour white	Matt white RAL 9016 (XX=MW)
Colour grey	Matt grey RAL 9006 (XX=GR)
Colour black	Matt black RAL 9005 (XX=BL)
Beam angle (FWHM)	60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 Years



This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.

874/2012



IP20

Sensor luminaires turn on for 4 minutes after detecting movement. A different time can be set for large orders.

REWARDING BRIGHTNESS

Item specifications (part A)


Description	Item code	Type	Input	W	Lm	Lm/W	CRI (typ.)	UGR	Pf	Ripple	Inrush current	B-16A Fuse
SensorLido 100 LV-600 Lm 3000K	787203XX8814	Incl. PSU	220-240V 8W	600	75	83	22.0	0.6	<3%	20A 170µS	50 pcs	
SensorLido 100 LV-600 Lm 4000K	787203XX9814	Incl. PSU	220-240V 8W	600	75	83	22.0	0.6	<3%	20A 170µS	50 pcs	

Item specifications (part B)


Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per carton	Expected lifespan (25°C)		
						L70B50	L80B50	L90B50
SensorLido 100 LV-600 Lm 3000K	II	A	468 gr	105x105x105 mm	35 pcs	282.168 hrs	178.352 hrs	87.206 hrs
SensorLido 100 LV-600 Lm 4000K	II	A	468 gr	105x105x105 mm	35 pcs	282.168 hrs	178.352 hrs	87.206 hrs

All values are measured at 230V (+/- 7%)

Dimensions



Fixation dimensions

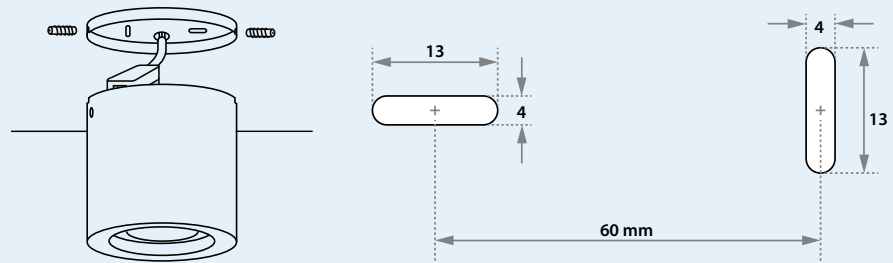

Detection area

