


## BLE-12WWSCW1

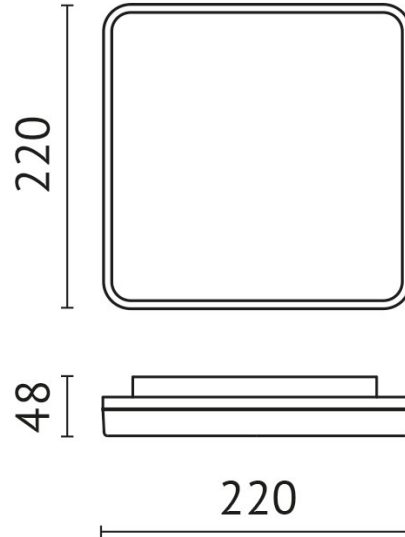

**quantity lamps:** 1

**Light up with:** SMD LED

**System power:** 12 W

**Luminous flux:** 1320 lm

**colour rendering index:** CRI >80

**beam angle:** 120 °

**Power supply:** with power supply

**connection voltage:** AC 230 V

**system efficiency:** 110 lm/W

**protection class:** 2

**mechanical load:** IK10

**colour:** white

**material:** PMMA

**version:** standard

**INFO\*:** 3000K=1255lm (105 lm/W) 4000K=1294lm (108 lm/W), 6000K=1320lm (110 lm/W) - switchable between 3000/4000/6000K

**lifespan:** 45.000 h

**protection type:** IP54

**dimension:** L=220\*W=220\*H=48 mm

**UGR\*:** 24,45

**ldt intern:** 8.2021

**EPREL Lichtquelle:** [1172873](#)



### Adresse/Kontakt