

Description

ERO, LED downlight, 13W, 350mA, 200-240V, 3000K, dia 145mm, incl. Philips LED driver, switchable between 3000K/4000K/5700K, in closed ceilings IP54, white

General data

Adjustability:	Not adjustable
Colour housing:	White
Degree of protection (IP):	IP54
Lamp holder:	None
Material housing:	Aluminium
Protection class:	I
Suitable for built-in mounting:	Yes

Photometric data

Beam angle:	Extreme wide beam >80°
Colour of light:	White
Colour rendering index CRI:	80-89
Colour temperature:	3000K - 5700K
Colour temperature adjustable:	Positions
Light outlet:	Direct
Light sharing:	Symmetric
Luminaire efficacy:	135lm/W
Luminous flux:	1703lm - 1756lm
Max. system power:	13W
Rated luminous flux according to IEC 62722-2-1:	1756lm
Suitable for number of lamps:	1
Unified Glare Ratio (UGR):	30.95

Electrical data

Exchangeable control gear:	Yes
-----------------------------------	-----



Address/Contact



A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



No dim function:	Yes
Nominal voltage:	220V - 240V
Voltage type:	AC
With control gear:	Yes

Product dimensions

Built-in diameter:	120mm
Built-in height/depth:	50mm
Height/depth:	50mm
Outer diameter:	145mm

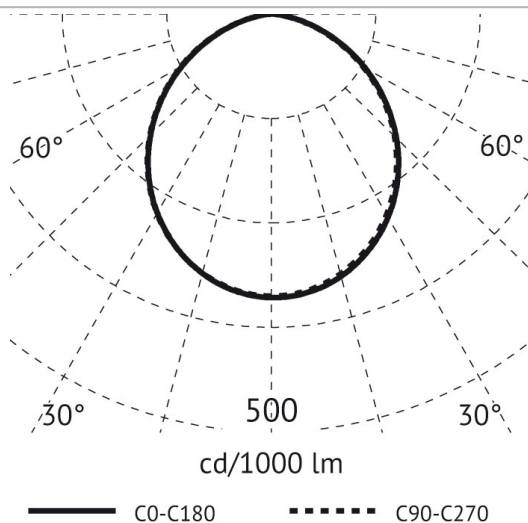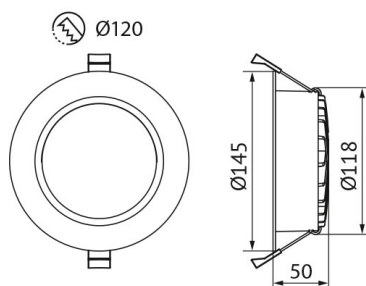

Adress/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de