



Description

FLEXY, LED-FLEX-MODUL, 5m, 1600 LED's, 10 W/m, 320 LED's/M, 4000K, 24V, Ra 90, IP68, useful luminous flux: 475 lm/0,5m (360°), energy consumption in on-mode: 5 kWh/1000h (5 W)/0,5 m, dimmable with specific drivers, L70B50: 33.000 h

General data

Degree of protection (IP):	IP67
Model:	Strip
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data


Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	4000K
Lamp power per meter:	10W
Luminaire efficacy:	95lm/W
Luminous flux per meter:	980lm
Number of nodes per meter:	320

Electrical data

Exchangeable control gear:	Yes
Lamp voltage:	0V
Length of particular segments:	50mm
Voltage type:	DC

Product dimensions

Height/depth:	6mm
Length:	5000mm
Width:	10mm



Height: 6 mm



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Description

FLEXY, LED-FLEX-MODUL, 5m, 1600 LED's, 10 W/m, 320 LED's/M, 2700K, 24V, Ra 90, IP68, useful luminous flux: 485 lm/0,5m (360°), energy consumption in on-mode: 5 kWh/1000h (5 W)/0,5 m, dimmable with specific drivers, L70B50: 33.000 h

General data

Degree of protection (IP):	IP67
Model:	Strip
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data


Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Lamp power per meter:	10W
Luminaire efficacy:	93lm/W
Luminous flux per meter:	960lm
Number of nodes per meter:	320

Electrical data

Exchangeable control gear:	Yes
Lamp voltage:	0V
Length of particular segments:	50mm
Voltage type:	DC

Product dimensions

Height/depth:	6mm
Length:	5000mm
Width:	10mm

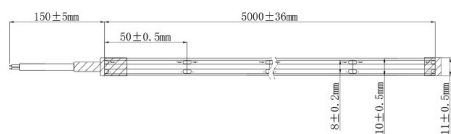

Height: 6 mm



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Description

FLEXY, LED-FLEX-MODUL, 5m, 1600 LED's, 10 W/m, 320 LED's/M, 3000K, 24V, Ra 90, IP68, useful luminous flux: 490 lm/0,5m (360°), energy consumption in on-mode: 5 kWh/1000h (5 W)/0,5 m, dimmable with specific drivers, L70B50: 33.000 h

General data

Degree of protection (IP):	IP67
Model:	Strip
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data


Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3000K
Lamp power per meter:	10W
Luminaire efficacy:	94lm/W
Luminous flux per meter:	970lm
Number of nodes per meter:	320

Electrical data

Exchangeable control gear:	Yes
Lamp voltage:	0V
Length of particular segments:	50mm
Voltage type:	DC

Product dimensions

Height/depth:	6mm
Length:	5000mm
Width:	10mm

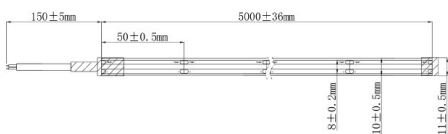

Height: 6 mm



Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de