



Description

FLEXY, LED-FLEX-MODUL, 5m, 700 LED's, 48W per reel, 9,6W/m, 140LED's/M, 4000K, 24V, Ra 90, P20, useful luminous flux: 470 lm/0,5m (360°), energy consumption in on-mode: 5 kWh/1000h (4,8 W)/0,5 m, dimmable with specific drivers, L70B50: 36.000 h

General data

Degree of protection (IP):	IP66
Model:	Hose
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data



Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	4000K
Lamp power per meter:	9.6W
Luminaire efficacy:	85lm/W
Luminous flux per meter:	816lm
Number of nodes per meter:	140

Electrical data

Exchangeable control gear:	Yes
Length of particular segments:	50mm
Lowest bending radius:	30mm
Voltage type:	DC

Product dimensions

Height/depth:	10mm
Length:	5000mm
Width:	10mm

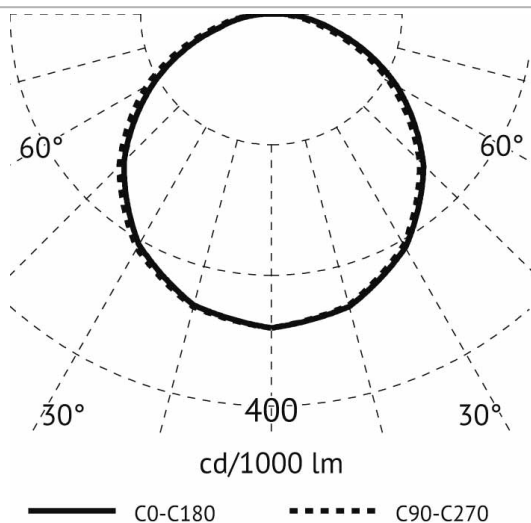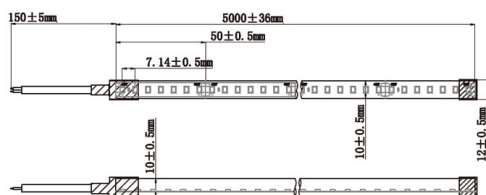

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de



Description

FLEXY, LED-FLEX-MODUL, 5m, 700 LED's, 48W per reel, 9,6W/m, 140LED's/M, 2700K, 24V, Ra 90, P20, useful luminous flux: 455 lm/0,5m (360°), energy consumption in on-mode: 5 kWh/1000h (4,8 W)/0,5 m, dimmable with specific drivers, L70B50: 36.000 h

General data

Degree of protection (IP):	IP66
Model:	Hose
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data



Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	2700K
Lamp power per meter:	9.6W
Luminaire efficacy:	79lm/W
Luminous flux per meter:	760lm
Number of nodes per meter:	140

Electrical data

Exchangeable control gear:	Yes
Length of particular segments:	50mm
Lowest bending radius:	30mm
Voltage type:	DC

Product dimensions

Height/depth:	10mm
Length:	5000mm
Width:	10mm

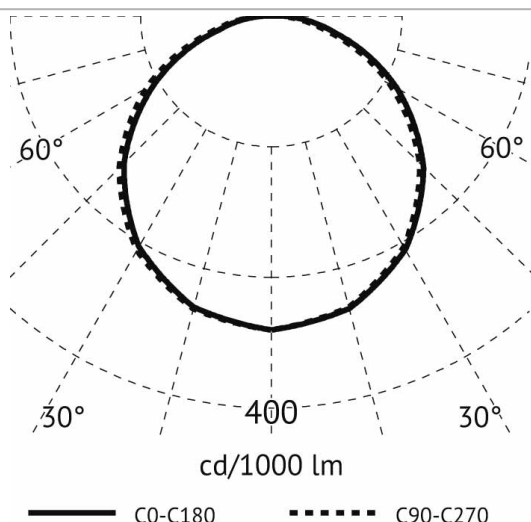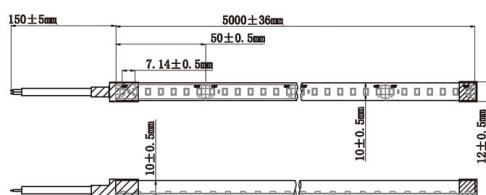

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de



Description

FLEXY, LED-FLEX-MODUL, 5m, 700 LED's, 48W per reel, 9,6W/m, 140LED's/M, 3000K, 24V, Ra 90, P20, useful luminous flux: 455 lm/0,5m (360°), energy consumption in on-mode: 5 kWh/1000h (4,8 W)/0,5 m, dimmable with specific drivers, L70B50: 36.000 h

General data

Degree of protection (IP):	IP66
Model:	Hose
Mounting method:	Surface mounting
Protection class:	III
Self-adhesive:	Yes

Photometric data



Beam angle:	120°
Colour of light:	White
Colour rendering index CRI:	90-100
Colour temperature:	3000K
Lamp power per meter:	9.6W
Luminaire efficacy:	82lm/W
Luminous flux per meter:	792lm
Number of nodes per meter:	140

Electrical data

Exchangeable control gear:	Yes
Length of particular segments:	50mm
Lowest bending radius:	30mm
Voltage type:	DC

Product dimensions

Height/depth:	10mm
Length:	5000mm
Width:	10mm

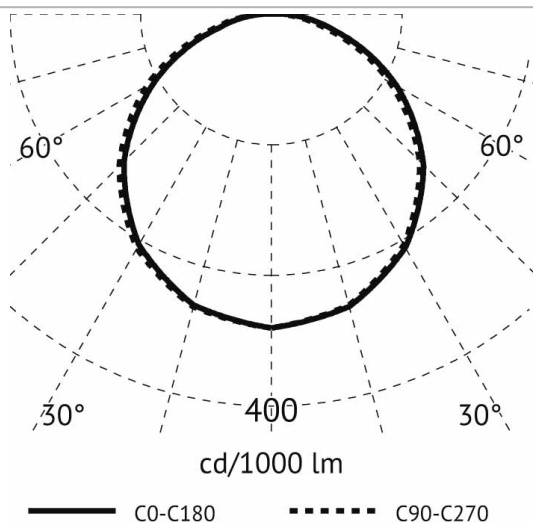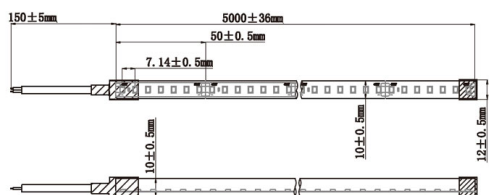

Address/Contact

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de