

## FEATURES

- High LED efficacy of 110Lm/W
- ENEC approved 2 channel Dali DT8 driver
- LED module can be programmed in other CCT (2700-6500K)
- Dimmable to 0,1%

## SPRINGS

Standard with GS spring (concrete/gyproc). Also available as above with WS spring (gyproc/metal).



## COLOURS

Available colours:



Matt white RAL 9016 (XX=MW)  
Matt black RAL 9005 (XX=BL)

# Linea 185 LV-TW

Fixed

## SPECIFICATIONS

Beam angle (FWHM)	60° / 80°
Fixture material	Housing: Die cast aluminium / Reflector glass: Polycarbonate
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C <sup>1</sup>
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Safety class	II
Energy class	A

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012

<sup>1</sup> In applications with a flat roof (f.i. car showrooms) the temperatures may exceed 45°C. Please ask our sales office for a special driver.




Only when the product is installed in a closed ceiling it may be exposed to water splashes, and only on its front side.

IP20

IP44

## LINEA 185 LV-TW 2700-6500K

Downlight incl. PSU

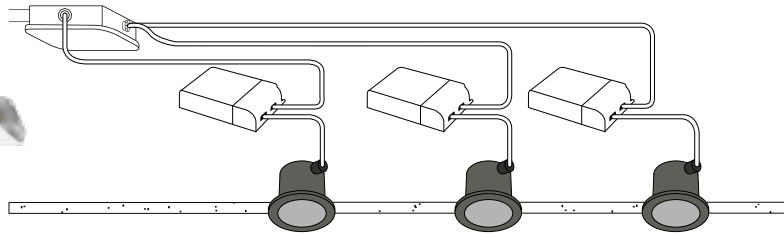

### ITEM SPECIFICATIONS (PART A)

Description	Item code GS	Item code WS	Extra	Input	W	Lm	Lm/W	CRI (typ.)
Linea 185 LV-TW 2700-6500K 1250Lm 60° Dali	876A03XX2B02	876A03XX9W02	incl. PSU	220-240V	11,4	1250	110	85/94
Linea 185 LV-TW 2700-6500K 1250Lm 60° Casambi	876A03XX2C02	876A03XX9X02	incl. PSU	220-240V	11,4	1250	110	85/94
Linea 185 LV-TW 2700-6500K 1250Lm 80° Dali	876A03XX2D02	876A03XX9Y02	incl. PSU	220-240V	11,4	1250	110	85/94
Linea 185 LV-TW 2700-6500K 1250Lm 80° Casambi	876A03XX2E02	876A03XX9Z02	incl. PSU	220-240V	11,4	1250	110	85/94

### ITEM SPECIFICATIONS (PART B)


Description	R9	Rf	Rg	R15	UGR	Pf	Ripple	Inrush	B16A
Linea 185 LV-TW 2700-6500K 1250Lm 60° Dali	96	95	103	100	16.6	0.90	<5%	200mA²s	106 pcs
Linea 185 LV-TW 2700-6500K 1250Lm 60° Casambi	96	95	103	100	16.6	0.90	<5%	200mA²s	106 pcs
Linea 185 LV-TW 2700-6500K 1250Lm 80° Dali	96	95	103	100	21.1	0.90	<5%	200mA²s	106 pcs
Linea 185 LV-TW 2700-6500K 1250Lm 80° Casambi	96	95	103	100	21.1	0.90	<5%	200mA²s	106 pcs

### ITEM SPECIFICATIONS (PART C)

Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per carton	Expected lifespan (25°C)		
						L70B50	L80B50	L90B50
Linea 185 LV-TW 2700-6500K 1250Lm 60° Dali	II	A	880 gr	233x233x85 mm	20 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs
Linea 185 LV-TW 2700-6500K 1250Lm 60° Casambi	II	A	880 gr	233x233x85 mm	20 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs
Linea 185 LV-TW 2700-6500K 1250Lm 80° Dali	II	A	880 gr	233x233x85 mm	20 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs
Linea 185 LV-TW 2700-6500K 1250Lm 80° Casambi	II	A	880 gr	233x233x85 mm	20 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs

All values are measured at 230V (+/- 7%)

### DIMENSIONS

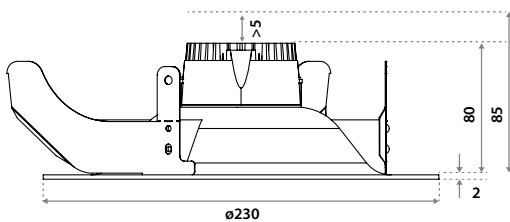


### HOLE SIZE



#### Using GS (gyproc) springs (concrete/gyproc)

For 8-85 mm ceiling thickness.  
Recess depth 85 mm (incl. 5mm space for air ventilation).  
For plasterboard ceilings or similar harder materials. Turn the ring on the front counterclockwise after installation.



#### Using WS (wire) springs (gyproc/metal)

For 1-35 mm ceiling thickness.  
Recess depth 85 mm (incl. 5mm space for air ventilation).  
For soft ceiling tiles. We recommend taking down the ceiling tile before installing the product.