



With integrated GA-016 + PSU adapter, not visible after installation.

HOUSING COLOURS
 Matt white RAL 9016
 Matt grey RAL 9006
 Matt black RAL 9005

COLOURS
 Available colours:

Nr	Housing	Front ring
XX=65	Matt white	White
XX=66	Matt white	Blue
XX=61	Matt white	Gold
XX=63	Matt white	Silver
XX=64	Matt white	Copper
XX=62	Matt white	Black
XX=85	Matt grey	White
XX=86	Matt grey	Blue
XX=81	Matt grey	Gold
XX=83	Matt grey	Silver
XX=84	Matt grey	Copper
XX=82	Matt grey	Black
XX=76	Matt black	White
XX=77	Matt black	Blue
XX=71	Matt black	Gold
XX=74	Matt black	Silver
XX=75	Matt black	Copper
XX=72	Matt black	Black

LV 80° (on request)

LV 18° / 37° / 60°

Odion XS

SPECIFICATIONS

Beam angle (FWHM)	18° / 37° / 60° (80° on request)
UGR (4H8H 70/50/20)	<19 (18° + 37°)
Fixture material	Die cast aluminium / Polycarbonate
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN 62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Energy class	A+

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012



Ask our sales department about the possibilities for:
 - Extra LED options from the LUXEON Stylist Series

IP20

CRI80/97 VARIATIONS

Odion XS LV 3000K CRI80 3000LM	page 3
Odion XS LV 4000K CRI80 3400LM	page 3
Odion XS LV 3000K CRI97 2150LM	page 3
Odion XS LV 3000K CRI97 3000LM	page 3


CRI80/97 CHOOSE YOUR LV LUMEN OUTPUT

	mA	W	Lumen Output			Lumen / Watt			Driver types			
			CRI80	CRI80	CRI97	CRI80	CRI80	CRI97	CRI80	CRI97	CRI80/97	CRI80/97
			3000K	4000K	3000K	3000K	4000K	3000K	No dim	No dim	Dali	Casambi
<i>Special request</i>	500	17,9	2250	2500	1450	125	139	81	GA-016	On request	GAC-616	GA
Standard	700	27,0	3000	3400	2150	111	126	80	GA-016	On request	GAC-616	GA
<i>Special request</i>	800	32,1	3400	3750	2500	106	117	78	GA-016	On request	On request	On request
<i>Special request</i>	850	33,9	3550	3900	2600	105	115	77	GA-016	On request	On request	On request
<i>Special request</i>	1050	41,7	4200	4700	3000 ¹	101	113	72 ¹	127692 ²	OT FIT 40	On request	On request

¹ Standard for Odion XS CRI97 no dim. ² Alternative integrated driver GA-016 G3 on request.


DIMENSIONS

- 228mm CRI80 + Stylist Series No dim 162mm CRI97 No dim
- 253mm CRI80 + Stylist Series Dali 253mm CRI97 Dali
- 228mm CRI80 + Stylist Series Casambi 228mm CRI97 Casambi

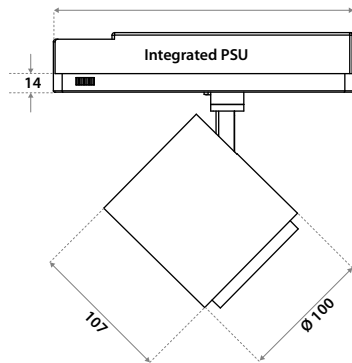

TRACKS

On request! Ask our sales department about the possibilities.



ODION XS

3000K/4000K

ITEM SPECIFICATIONS (PART A)

Description	18°		37°		60°		mA
	Item code	UGR	Item code	UGR	Item code	UGR	
Odion XS 3000Lm 3000K CRI80 No dim	350403XXHK02	14.9	350403XXHL02	16.0	350403XXHM02	20.4	700
Odion XS 3000Lm 3000K CRI80 Dali	350403XXE402	14.9	350403XXE502	16.0	350403XXE602	20.4	700
Odion XS 3000Lm 3000K CRI80 Casambi	350403XXJ402	14.9	350403XXJ502	16.0	350403XXJ602	20.4	700
Odion XS 3400Lm 4000K CRI80 No dim	350403XXHN02	15.4	350403XXHP02	16.4	350403XXHQ02	20.8	700
Odion XS 3400Lm 4000K CRI80 Dali	350403XXE702	15.4	350403XXE802	16.4	350403XXE902	20.8	700
Odion XS 3400Lm 4000K CRI80 Casambi	350403XXJ702	15.4	350403XXJ802	16.4	350403XXJ902	20.8	700
Odion XS 3000Lm 3000K CRI97 No dim 1	350403XXHG02	14.9	350403XXHH02	16.0	350403XXHJ02	20.4	1050
Odion XS 2150Lm 3000K CRI97 Dali	350403XXE102	14.2	350403XXE202	15.2	350403XXE302	19.6	700
Odion XS 2150Lm 3000K CRI97 Casambi	350403XXJ102	14.2	350403XXJ202	15.2	350403XXJ302	19.6	700

ITEM SPECIFICATIONS (PART A)

Description	W	Lm	Lm/W	CRI (typ.)	Pf	Ripple	Inrush current	B-16A Fuse	Safety class	Energy class
Odion XS 3000Lm 3000K CRI80 No dim	27,0	3000	111	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3000Lm 3000K CRI80 Dali	27,0	3000	111	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3000Lm 3000K CRI80 Casambi	27,0	3000	111	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3400Lm 4000K CRI80 No dim	27,0	3000	126	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3400Lm 4000K CRI80 Dali	27,0	3000	126	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3400Lm 4000K CRI80 Casambi	27,0	3000	126	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3000Lm 3000K CRI97 No dim 1	41,7	3400	72	97	0.97	<3%	5A 50µS	50	I	A+
Odion XS 2150Lm 3000K CRI97 Dali	27,0	3400	80	97	0.97	<3%	5A 50µS	50	I	A+
Odion XS 2150Lm 3000K CRI97 Casambi	27,0	3400	80	97	0.97	<3%	5A 50µS	50	I	A+

ITEM SPECIFICATIONS (PART C)

Description	Weight	Dimensions single carton	Quantity per carton	Expected lifespan (25°C)		
				L70B50	L80B50	L90B50
Odion XS	840 gr	251x241x123 mm	12 pcs	131.000 hrs	80.000 hrs	35.000 hrs