

### ■ Features

- Constant Voltage + Constant Current mode output
- Plastic housing with Class II design
- Built-in active PFC function
- Class 2 power unit(except NPF-90-12/15)
- No load power consumption <0.15W
- P67 rating for indoor or outdoor installations
- Typical lifetime>50000 hours
- 5 years warranty

### ■ Applications


- LED panel lighting
- LED downlight
- LED decorative lighting
- LED tunnel lighting
- Moving sign

### ■ Description

NPF-90 series is a 90W AC/DC LED driver featuring the dual modes constant voltage and constant current output. NPF-90 operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for -40°C ~ +85°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations.

### ■ Model Encoding

**NPF - 90 - 24**

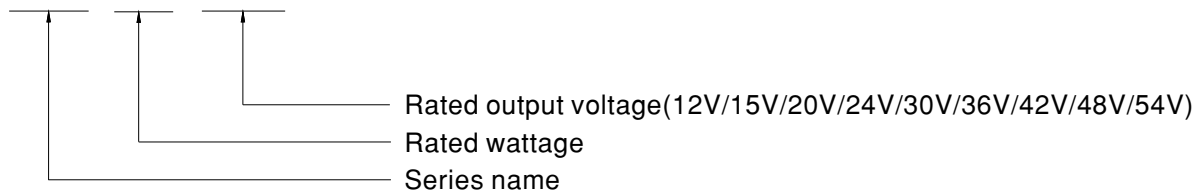





**SPECIFICATION**


| MODEL                     | NPF-90-12  | NPF-90-15  | NPF-90-20  | NPF-90-24 | NPF-90-30  | NPF-90-36 | NPF-90-42  | NPF-90-48  | NPF-90-54  |            |  |
|---------------------------|--|--|------------|-----------|------------|-----------|------------|------------|------------|------------|--|
| OUTPUT                    | DC VOLTAGE   | 12V  | 15V        | 20V       | 24V        | 30V       | 36V        | 42V        | 48V        | 54V        |  |
|                           | CONSTANT CURRENT REGION <small>Note.2</small>  | 7.2 ~ 12V  | 9 ~ 15V    | 12 ~ 20V  | 14.4 ~ 24V | 18 ~ 30V  | 21.6 ~ 36V | 25.2 ~ 42V | 28.8 ~ 48V | 32.4 ~ 54V |  |
|                           | RATED CURRENT  | 7.5A   | 6A         | 4.5A      | 3.75A      | 3A        | 2.5A       | 2.15A      | 1.88A      | 1.67A      |  |
|                           | RATED POWER <small>Note.5</small>  | 90W  | 90W        | 90W       | 90W        | 90W       | 90W        | 90.3W      | 90.24W     | 90.18W     |  |
|                           | RIPPLE & NOISE (max.) <small>Note.3</small>  | 150mVp-p   | 150mVp-p   | 150mVp-p  | 150mVp-p   | 200mVp-p  | 200mVp-p   | 250mVp-p   | 250mVp-p   | 350mVp-p   |  |
|                           | VOLTAGE TOLERANCE <small>Note.4</small>  | ±4.0%  | ±4.0%      | ±4.0%     | ±3.0%      | ±3.0%     | ±2.0%      | ±1.0%      | ±1.0%      | ±1.0%      |  |
|                           | LINE REGULATION  | ±0.5%  | ±0.5%      | ±0.5%     | ±0.5%      | ±0.5%     | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%      |  |
|                           | LOAD REGULATION  | ±1.5%  | ±1.0%      | ±0.5%     | ±0.5%      | ±0.5%     | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%      |  |
|                           | SETUP, RISE TIME <small>Note.6</small>   | 500ms, 80ms 115VAC / 230VAC  |            |           |            |           |            |            |            |            |  |
| HOLD UP TIME (Typ.)       | 16ms/230VAC 16ms/115VAC  |  |            |           |            |           |            |            |            |            |  |
| INPUT                     | VOLTAGE RANGE <small>Note.5</small>  | 90 ~ 305VAC 127 ~ 431VDC<br>(Please refer to "STATIC CHARACTERISTIC" section)  |            |           |            |           |            |            |            |            |  |
|                           | FREQUENCY RANGE  | 47 ~ 63Hz  |            |           |            |           |            |            |            |            |  |
|                           | POWER FACTOR   | PF ≥ 0.98/115VAC, PF ≥ 0.96/230VAC, PF ≥ 0.94/277VAC@full load<br>(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) |            |           |            |           |            |            |            |            |  |
|                           | TOTAL HARMONIC DISTORTION  | THD < 20% (@load ≥ 60%/115VAC, 230VAC; @load ≥ 75%/277VAC)<br>(Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)       |            |           |            |           |            |            |            |            |  |
|                           | EFFICIENCY (Typ.)  | 89%  | 89.5%      | 90.5%     | 91%        | 89.5%     | 90.5%      | 90.5%      | 90.5%      | 90.5%      |  |
|                           | AC CURRENT   | 0.95A / 115VAC 0.5A / 230VAC 0.4A / 277VAC   |            |           |            |           |            |            |            |            |  |
|                           | INRUSH CURRENT(Typ.)   | COLD START 60A(twidth=550µs measured at 50% Ipeak) at 230VAC; Per NEMA 410   |            |           |            |           |            |            |            |            |  |
|                           | MAX. No. of PSUs on 16A CIRCUIT BREAKER  | 3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC  |            |           |            |           |            |            |            |            |  |
|                           | LEAKAGE CURRENT  | <0.25mA / 277VAC   |            |           |            |           |            |            |            |            |  |
| NO LOAD POWER CONSUMPTION | <0.15W   |  |            |           |            |           |            |            |            |            |  |
| PROTECTION                | OVER CURRENT   | 95 ~ 108%<br>Constant current limiting, recovers automatically after fault condition is removed                                |            |           |            |           |            |            |            |            |  |
|                           | SHORT CIRCUIT  | Hiccup mode, recovers automatically after fault condition is removed   |            |           |            |           |            |            |            |            |  |
|                           | OVER VOLTAGE   | 15 ~ 17V   | 17.5 ~ 21V | 23 ~ 27V  | 28 ~ 34V   | 34 ~ 40V  | 41 ~ 46V   | 46 ~ 54V   | 54 ~ 60V   | 59 ~ 66V   |  |
|                           | OVER TEMPERATURE   | Shut down o/p voltage, re-power on to recover  |            |           |            |           |            |            |            |            |  |
| ENVIRONMENT               | WORKING TEMP.  | Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)   |            |           |            |           |            |            |            |            |  |
|                           | MAX. CASE TEMP.  | Tcase=+85°C  |            |           |            |           |            |            |            |            |  |
|                           | WORKING HUMIDITY   | 20 ~ 95% RH non-condensing   |            |           |            |           |            |            |            |            |  |
|                           | STORAGE TEMP., HUMIDITY  | -40 ~ +80°C, 10 ~ 95% RH   |            |           |            |           |            |            |            |            |  |
|                           | TEMP. COEFFICIENT  | ±0.03%/°C (0 ~ 50°C)   |            |           |            |           |            |            |            |            |  |
|                           | VIBRATION  | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes  |            |           |            |           |            |            |            |            |  |
| SAFETY & EMC              | SAFETY STANDARDS <small>Note.8</small>   | UL8750, CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13 independent, EN62384, IP67 approved; Design refer to EN60335-1   |            |           |            |           |            |            |            |            |  |
|                           | WITHSTAND VOLTAGE  | I/P-O/P:3.75KVAC   |            |           |            |           |            |            |            |            |  |
|                           | ISOLATION RESISTANCE   | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH   |            |           |            |           |            |            |            |            |  |
|                           | EMC EMISSION <small>Note.8</small>   | Compliance to EN55015, EN61000-3-2 Class C (@load ≥ 60%); EN61000-3-3  |            |           |            |           |            |            |            |            |  |
| EMC IMMUNITY              | Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level (surge immunity Line-Line 2KV)   |  |            |           |            |           |            |            |            |            |  |
| OTHERS                    | MTBF   | 1011.4K hrs min. Telcordia SR-332 (Bellcore); 292.8Khrs min. MIL-HDBK-217F (25°C)  |            |           |            |           |            |            |            |            |  |
|                           | DIMENSION  | 171*63*37.5mm (L*W*H)  |            |           |            |           |            |            |            |            |  |
|                           | PACKING  | 0.77Kg; 18pcs/14.9Kg/0.82CUFT  |            |           |            |           |            |            |            |            |  |
| NOTE                      | <ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.</li> <li>Please refer to "DRIVING METHODS OF LED MODULE".</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</li> <li>Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</li> <li>The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> <li>The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model . Please contact MEAN WELL for details.</li> <li>This series meets the typical life expectancy of &gt;50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75°C or less.</li> <li>Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a></li> </ol> |  |            |           |            |           |            |            |            |            |  |



**OUTPUT LOAD vs TEMPERATURE**

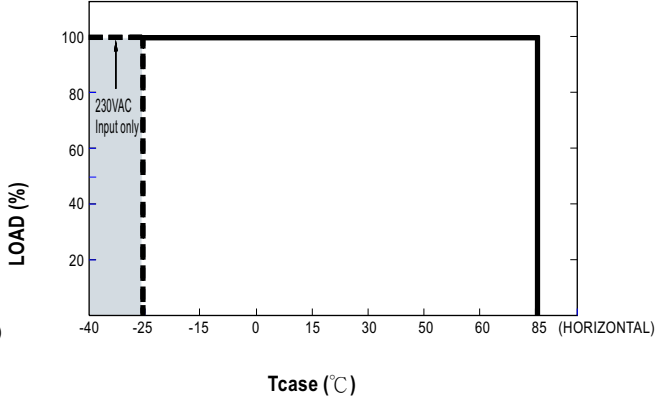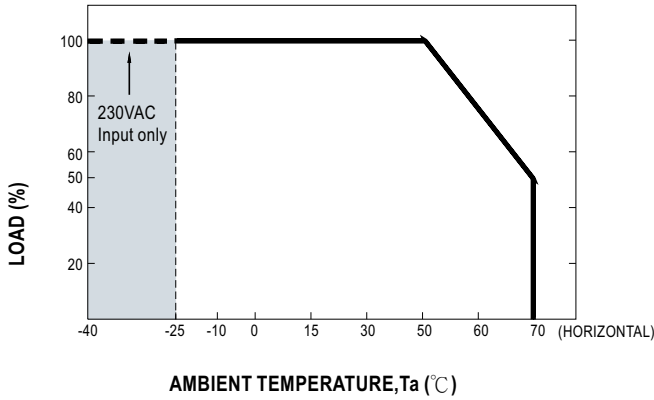


**STATIC CHARACTERISTIC**

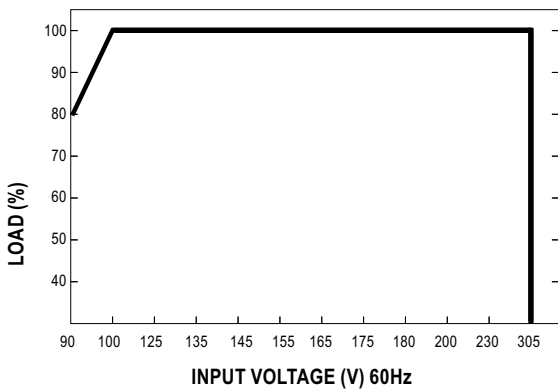

※ De-rating is needed under low input voltage.


**POWER FACTOR (PF) CHARACTERISTIC**

※  $T_{case}$  at 75°C

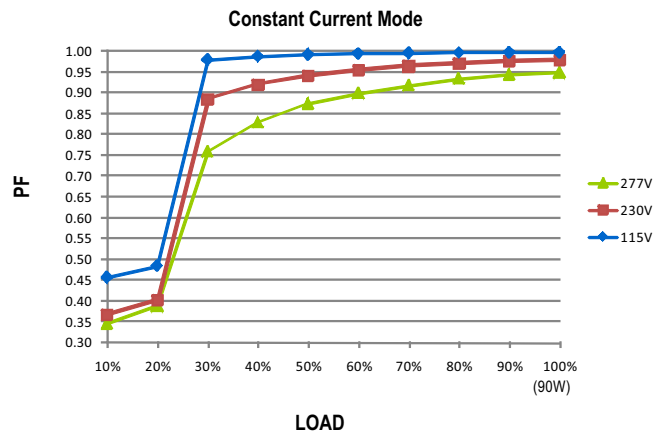

**TOTAL HARMONIC DISTORTION (THD)**


※ 48V Model,  $T_{case}$  at 75°C

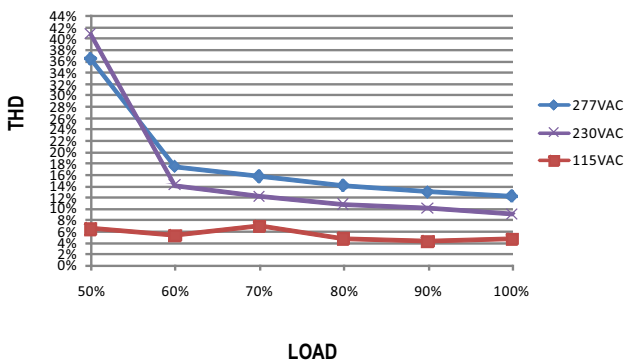

**EFFICIENCY vs LOAD**


NPF-90 series possess superior working efficiency that up to 90.5% can be reached in field applications.

※ 48V Model,  $T_{case}$  at 75°C

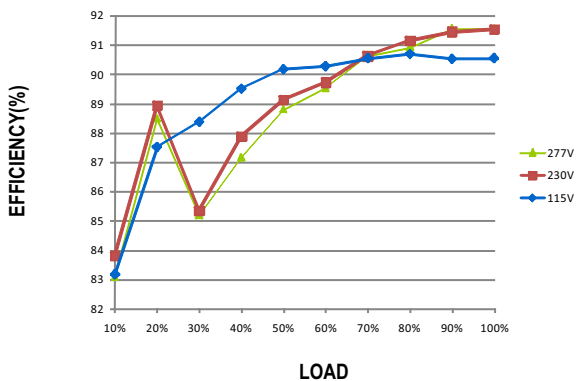




■ LIFE TIME

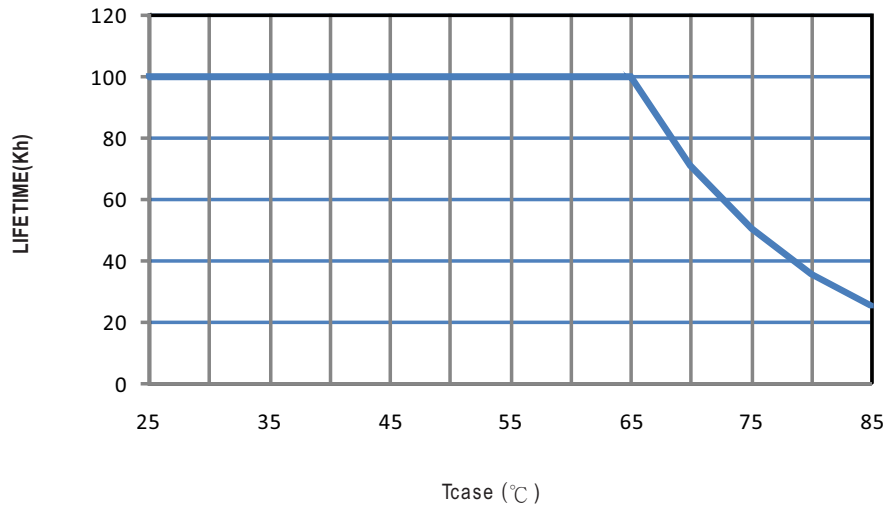

## MECHANICAL SPECIFICATION

CASE NO.: PWM-90P Unit:mm

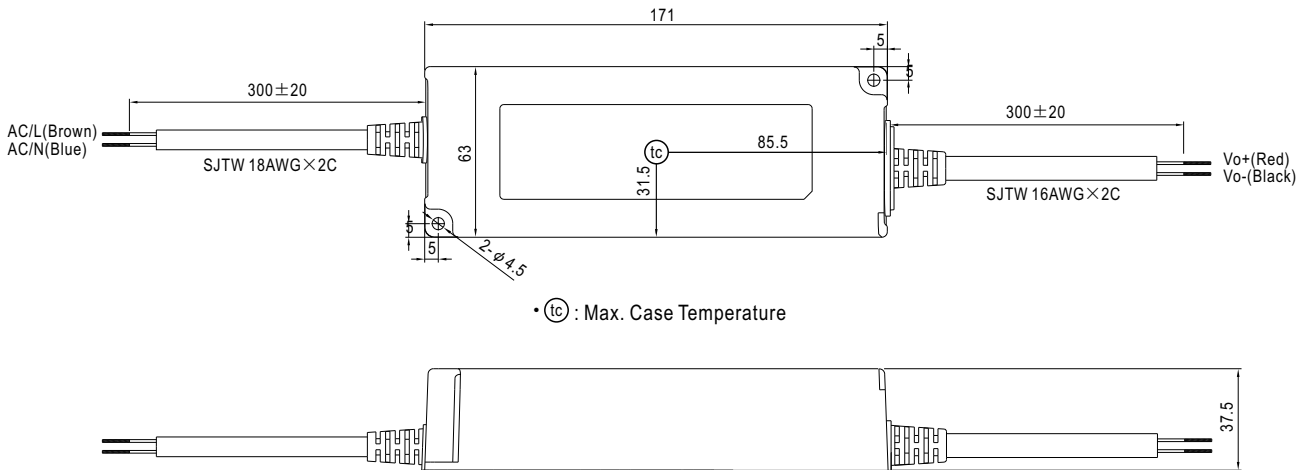

## INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>